

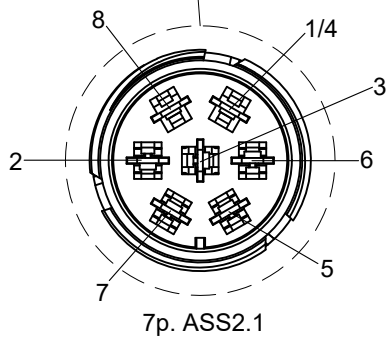

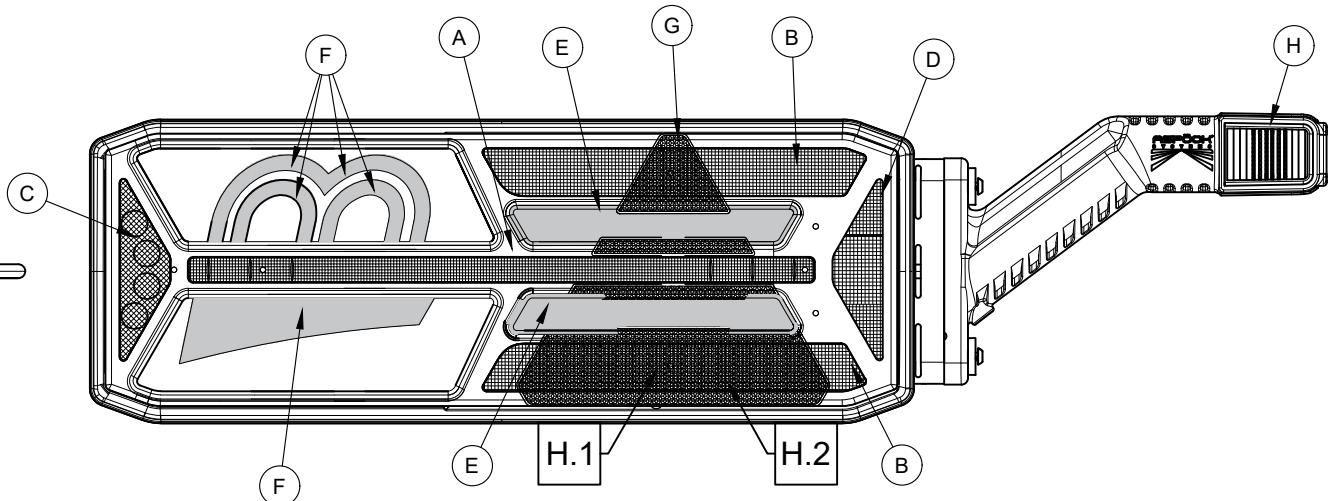


Level	Zone	ECI N°.	Revision note	Date	Designed	Checked

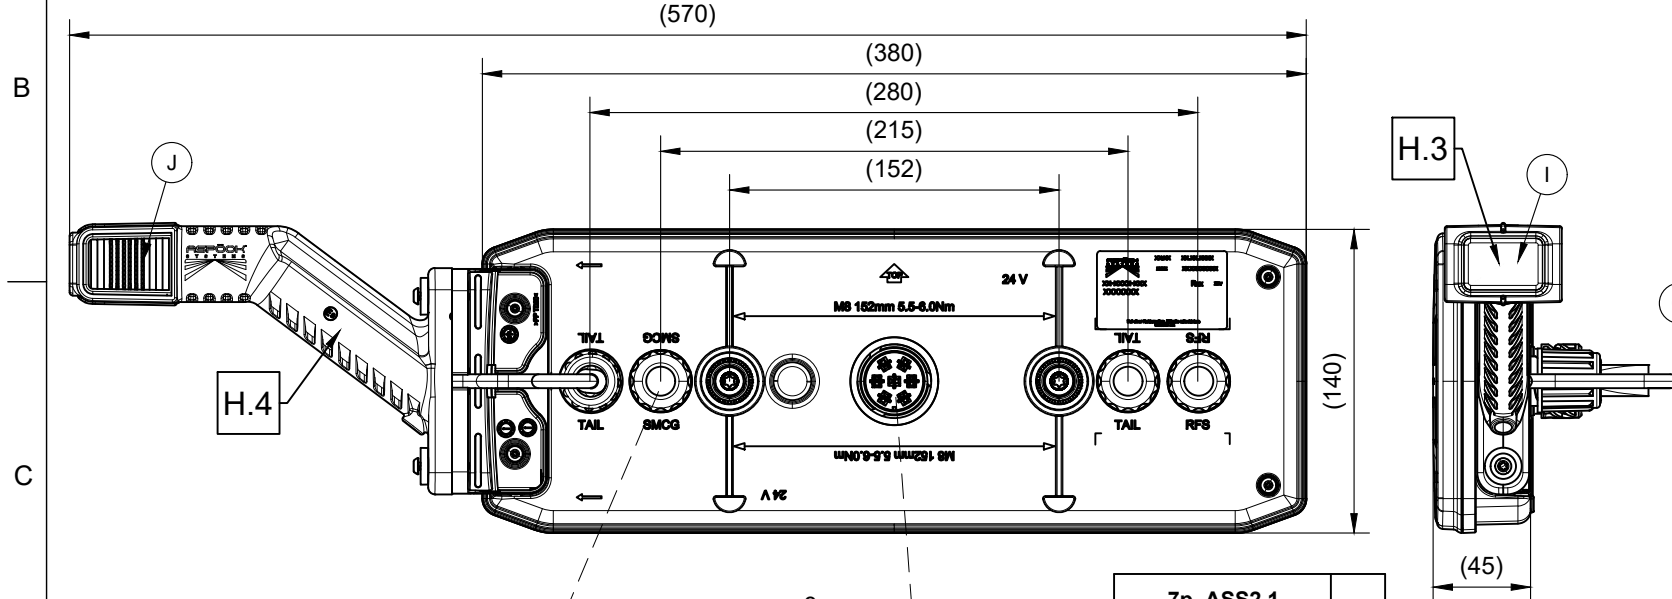

7p. ASS2.1	
function	pin
Blinker RH <i>DI RH</i>	1 / 4
Nebelschl. <i>Fog</i>	2
Masse <i>GND</i>	3
Rücklicht RH <i>Tail RH</i>	5
Bremse <i>Stop</i>	6
Rücklicht LH <i>Tail LH</i>	7
Rückfahrl. <i>Reverse</i>	8

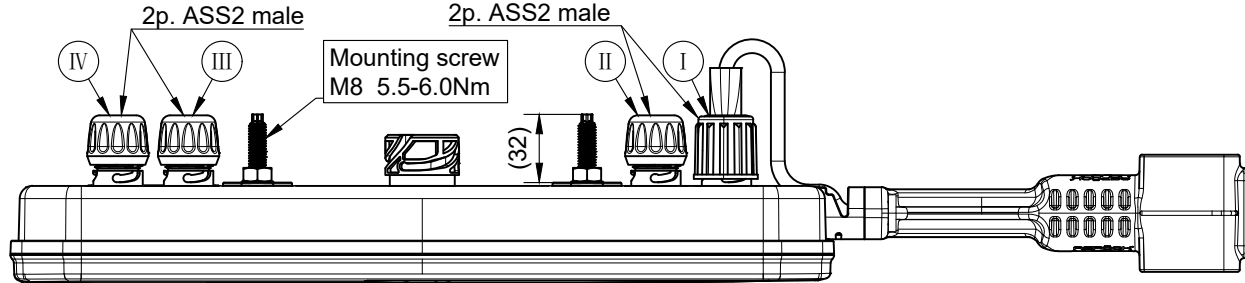

Technische Daten zur SMCG/technical specification for SMCG:

Spannungsbereich/voltage range: 18V - 33V
Strombereich/current range: Ausgangsstrom/output current max. 1A
Elektronisch Überspannungs - und Überstromgesichert/overcurrentprotected
Thermische Stromabschaltung am Ausgang bei ca. 1,2A
(Kurzschlussfest) Verpolungsschutz/thermal power cut-off at the output at approx. (shortcircuit proof) reserve polarity protection

Homologation description							
H.1	E9 22737 16716	148R 00	R1	S1	2a	AR	F1
H.2	E24 3902	10R 06	IIIA				
H.3	E9 6878	SM1 00	A 02	R1 02			
H.4	E9 6765	10R 05					

FUNCTION:	
Rücklicht. LH <i>Tail LH</i>	I
SMCG Ausgang (Rückl. RH) <i>SMCG out (Tail RH)</i>	II
Rücklicht. RH <i>Tail RH</i>	III
Rückfahrl. <i>Reverse</i>	IV

FUNCTION:	
Blinker RH LED <i>DI RH LED</i>	A
Bremse LED <i>Stop LED</i>	B
Nebelschl. LED <i>Fog LED</i>	C
Rückfahrl. LED <i>Reverse LED</i>	D
Rücklicht RH LED <i>Tail RH LED</i>	E
Rücklicht LH LED <i>Tail LH LED</i>	F
Reflektierendes Dreieck <i>Reflex reflector triangle</i>	G
Positionslicht rot (Umrissarm) <i>Position light red (rubber arm) (Tail LH)</i>	H
Seitenmarkierung rot (Umrissarm) <i>Side marker red (rubber arm) (Tail LH)</i>	I
Positionslicht weiss (Umrissarm) <i>Position light white (rubber arm) (Tail LH)</i>	J

Electrical Specification				
Funktion <i>Function</i>	Nennspannung <i>Nominal Voltage</i>	Spannungsbereich <i>Voltage Range</i>	Nennstrom <i>Nominal Current</i>	Nennleistung <i>Nominal Power</i>
	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
DI	24V	18V - 33V	0.35A	8.3W
Stop	24V	18V - 33V	0.16A	3.8W
Reverse	24V	18V - 33V	0.11A	2.7W
Fog	24V	18V - 33V	0.17A	4.0W
Tail RH	24V	18V - 33V	0.15A	3.6W
Tail LH	24V	18V - 33V	0.10A	2.5W
End outline marker	24V	10V - 30V	0.12A	3.0W

CP_03-0_Bemaßungsrichtlinie () Auxiliary dimension DIN 406-10		Theoretical dimension ISO 1101	
Test dimension (SPC) [] Unfinished dimension DIN 406-10		Surface quality ISO 1302	
Designed by Wetzlmaier Gerlinde 2025/02/27		Checked by Livinski Gabriela 2025/02/27	
Approved by ELnzenweger Stefan 2025/02/27		ASPÖCK Design Engineering APPROVED	
Designation EcoLED III MENCI RH ASS2 7P+4x2P SMCG+EOL		Project number -	
Drawing Nr. 25412210		Tolerance CP_04-2_Toleranzen Verkabelungsprodukte	
Business Unit SALES - 24		Weight -	Scale not in scale
Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication there of to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.		Level R01	Sheet 1 / 1

Schutzart in Verbindung mit passendem Gegenstecker.
Bauseitig geeignete ADR Installation, mind. IP54 erforderlich!
Protection class in conjunction with suitable mating connector.
Suitable ADR installation on site, at least IP54 required!

