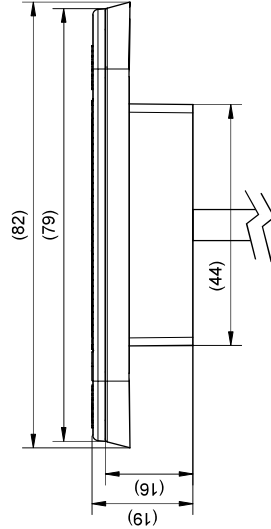
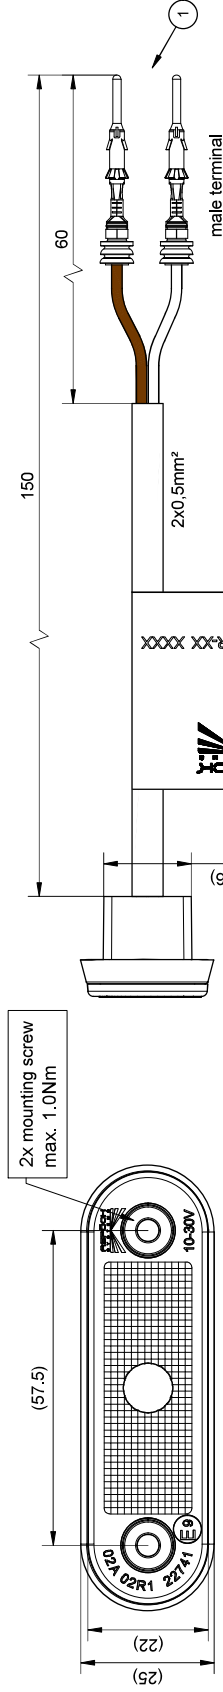


[illegible]

CONNECTOR:	①
function	wire colour
Masse GND	weiss white
Rücklicht	braun
Tail	brown

Electrical Specification				
Funktion Function	Nennspannung Nominal Voltage	Spannungsbereich Voltage Range	Nennstrom Nominal Current	Nennleistung Nominal Power
	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
Front Position Marker	12V / 24V	10V - 30V	0.05A / 0.03A	0.6W

Customer Identification number
1464104

31-7100-167		Designation Posipoint 2.1 WS		Drawing Nr. 31710016		Business Unit SALES - 24		Tolerance Asp. PAW 100.53b1		Weight - g		Scale X:X				
		Leidinger Sabine		2021/04/20		Checked by Strubreiter Daniel		2021/04/22		Approved by Grüneis Günther		2021/05/21				
		Asp. Norm AAW075.04 () Auxiliary dimension DIN 406-10 [] Unfinished dimension DIN 406-10		Designed by Test dimension (SPC)		() []		() []		() []		Theoretical dimension ISO 1101 Surface quality ISO 1302				
Part			Dimensions in mm		Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.								Level R01		Sheet 1 / 1	
												Project number -				

* IP6K9K gilt nur für die Leuchtenreihe
ADR nur in Kombination mit dem Verkabelungssystem SCB ID 1464103 (DE-208126-0048)

* IP6K9K only applies to the lighting unit
ADR only in combination with the cabling harness SCB ID 1464103 (DE-208126-0048)

Homologation description				
H.1	E9 22741	A 02		
H.2	E24 2645	10R 05		