



* ADR gilt nur für Kabel und Verbinder
* ADR applies only to the cable and connector

*


D

C

B



A

Detail A:



ASPÖCK Standard Etikett
ASPÖCK default Label




CONNECTOR:	①		
function	pin	wire colour	bridged
eRx1 CAN Low	1	-	-
eRx1 CAN High	2	-	-
KL15	3	rot red	rot red
Vin	4	-	rot red
Chassis Can Low	5	grün/weiss green/white	-
Chassis Can High	6	gelb/weiss yellow/white	-
NC	7	-	-
eRx2 CAN Low	8	-	-
eRx2 CAN High	9	-	-
eRx1 VDD	10	-	-
eRx1 GND	11	-	-
NC	12	-	-
GND KL31	13	blau blue	-
Reserved / CAN Low Pass-through	14	-	-
Reserved / CAN Low Pass-through	15	-	-
NC	16	-	-
eRx2 GND	17	-	-
eRx2 VDD	18	-	-

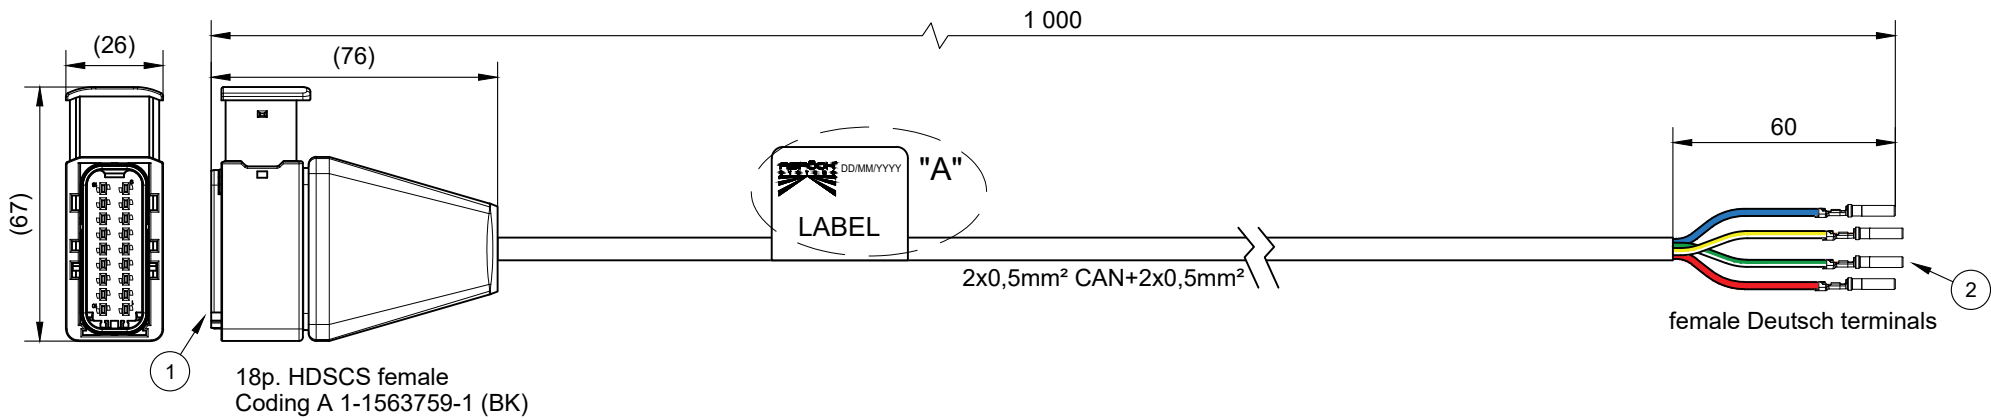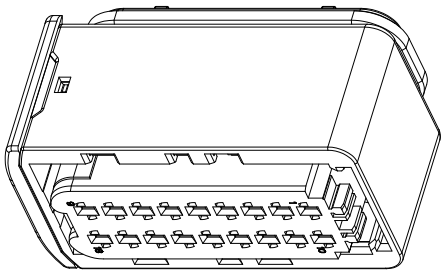

18p. HDSCS female
Coding A 1-1563759-1 (BK)

female Deutsch terminals

CONNECTOR:	②	
function	pin	wire colour
NO FUNCTION	1	-
NO FUNCTION	2	-
+VDC Bat AUX IO3	3	rot red
NO FUNCTION	4	-
NO FUNCTION	5	-
NO FUNCTION	6	-
NO FUNCTION	7	-
NO FUNCTION	8	-
CAN Low 5V-TT-CAN-L	9	grün/weiss green/white
CAN High 5V-TT-CAN-H	10	gelb/weiss yellow/white
Masse/GND AUX IO RET3	11	blau blue
NO FUNCTION	12	-

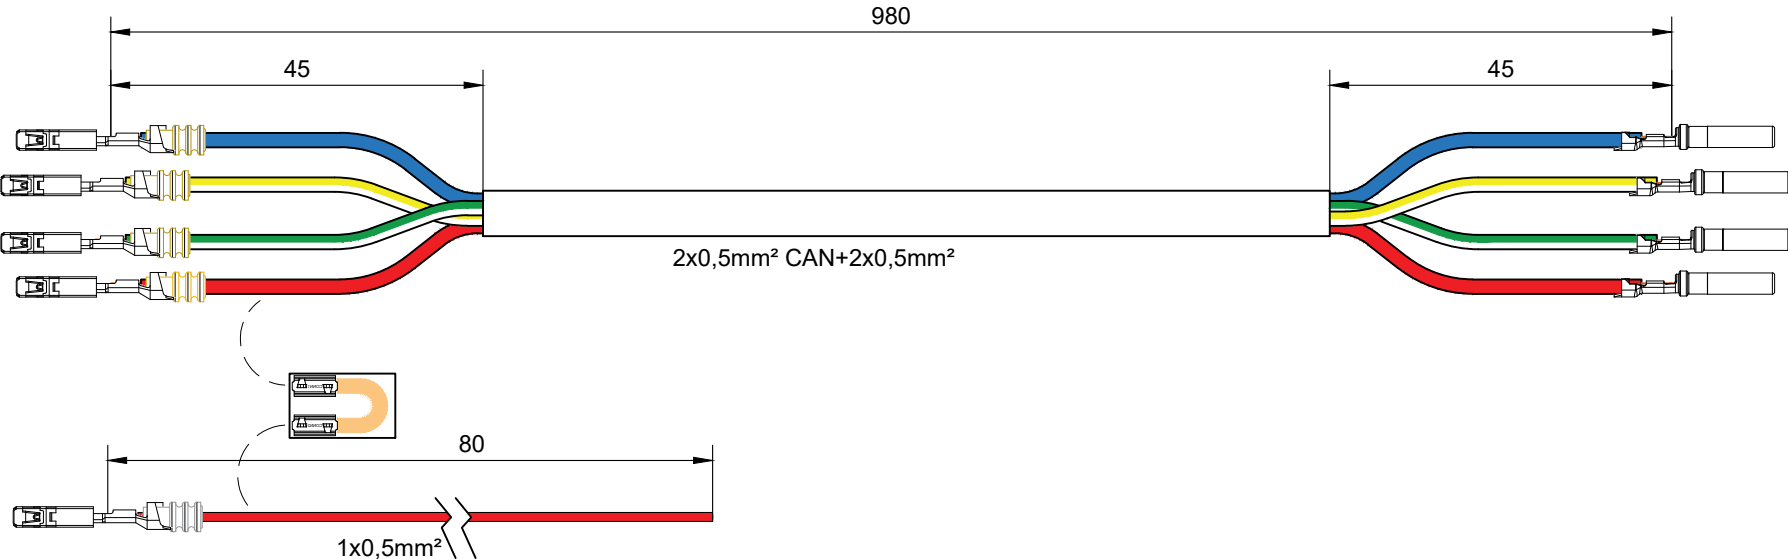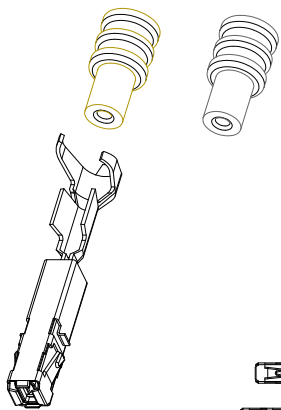

78-7022-007 Part Number	CP_03-0_Bemaßungsrichtlinie () Auxiliary dimension DIN 406-10		Theoretical dimension ISO 1101	
	Test dimension (SPC) [] Unfinished dimension DIN 406-10		Surface quality ISO 1302	
	Designed by Leidinger Sabine	Checked by Strubreiter Daniel	Approved by Enzmüller Manuel	
	2023/10/12		2023/10/17	2023/10/17
ASPOCK SYSTEMS	Designation TPMS Knorr EBS3-Rx18 1m		Project number 1237	
	Drawing Nr. 78702200		Tolerance CP_04-2_Toleranzen Verkabelungsprodukte	
	Business Unit SALES - 24		Weight -	Scale not in scale
	Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.		Level R01	Sheet 1 / 1