

Fanale posteriore a LED
LED Rear Combination Lamp

PRO-RAIL 3F



NEW



Tecnologia guida di luce a LED
Light guide technology


40 258 012
12 Volt

Con LCG integrato per la funzione freccia
integrated Direction Indicator monitoring system

Descrizione
Description

- Funzioni:
- Posizione a LED, Stop a LED, Freccia a LED
- Design moderno con la tecnologia guida di luce a LED
- Catadiottro integrato
- Gemma in policarbonato
- Fanale a tenuta stagna
- LCG integrato per la funzione freccia
- 12V
- Con cavo sguainato da 2 m
- Omologato ECE
- Omologato EMC, ECE R10
- Functions:
- LED Stop Lamp, LED Direction Indicator Lamp, LED Tail Lamp
- stylish design due to light guide technology
- integrated Reflex Reflector
- Lens is constructed of unbreakable PC
- LED lamp complete waterproof casted
- integr. LED Control Gear for Direction Indicator Lamp
- 12 Volt
- 2,0m cable open end
- ECE approved
- EMC approved, ECE R10

Disegni
Drawing

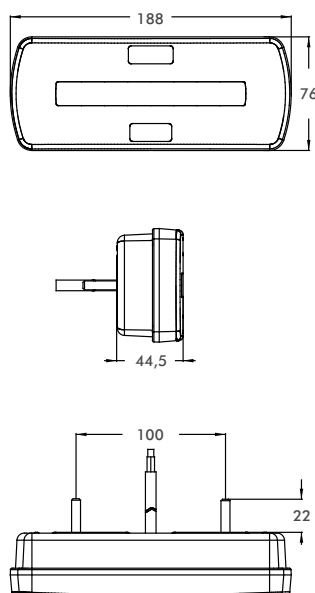

Fissaggio
Fixation



Orizzontale/
horizontal



Verticale/
vertical

Ulteriori prodotti sono consultabili sul catalogo PROPLAST o sulla pagina web www.proplast-online.de



www.proplast-online.de



Fanale a LED
LED Rear Combination Lamp

PRO-RAIL 5F



NEW



Tecnologia guida di luce a LED
Light guide technology

40 260 001
12/24 Volt

40 260 012
12 Volt


Versione 12V con LCG integrato
per la funzione freccia

*12 Volt Version with integrated
Direction Indicator monitoring system*

Descrizione
Description

- Funzioni:
Posizione a LED, Stop a LED, Freccia a LED, Retromarcia a LED, Retronebbia a LED
- Design moderno con la tecnologia guida di luce a LED
- Catadiottro integrato
- Gemma in policarbonato
- Fanale a tenuta stagna
- LCG integrato per la funzione freccia
- 12/24V (senza LCG)
- 12V (con LCG per la funzione freccia)
- Con cavo sguainato da 2 m
- Omologato ECE
- Omologato EMC, ECE R10
- Functions:
LED Stop Lamp, LED Direction Indicator Lamp, LED Tail Lamp, LED Reversing Lamp, LED Fog Lamp
- stylish design due to light guide technology
- integrated Reflex Reflector
- Lens is constructed of unbreakable PC
- LED lamp complete waterproof casted
- 12/24 Volt (without LCG)
- 12 Volt (with LCG for Dir. Indicator Lamp)
- 2,0m cable open end
- ECE approved
- EMC approved, ECE R10

Disegni
Drawing

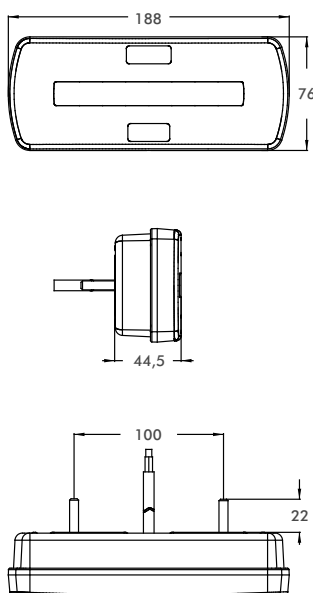

Fissaggio
Fixation



Orizzontale/
horizontal



Verticale/
vertical

Ulteriori prodotti sono consultabili sul catalogo PROPLAST o sulla pagina web www.proplast-online.de



www.proplast-online.de

