



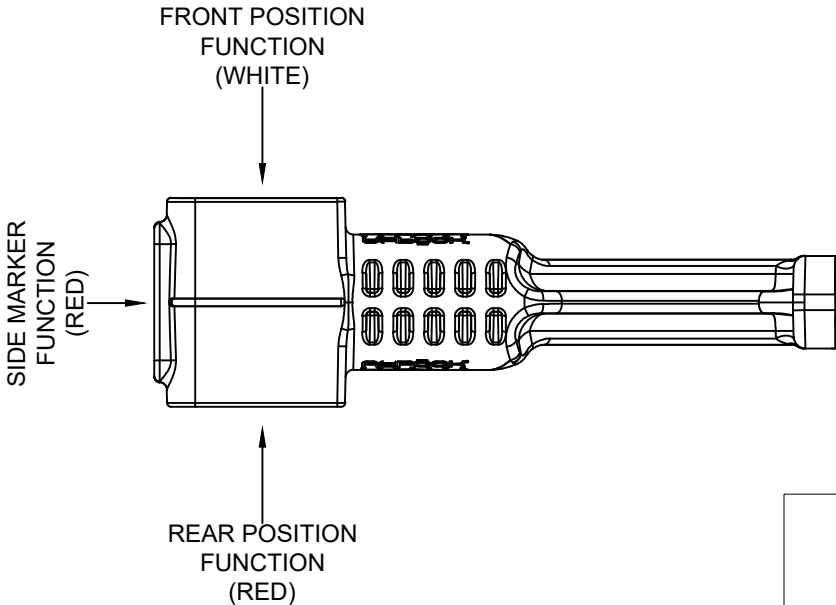

Homologation description					
H.1	E9 6878	SM1 00	A 02	R1 02	
H.2	E9 6765	10R 05			

CONNECTOR:		①	
function	pin	pin	wire colour
Masse GND	1		weiss white
+VDC +VDC	2		braun brown

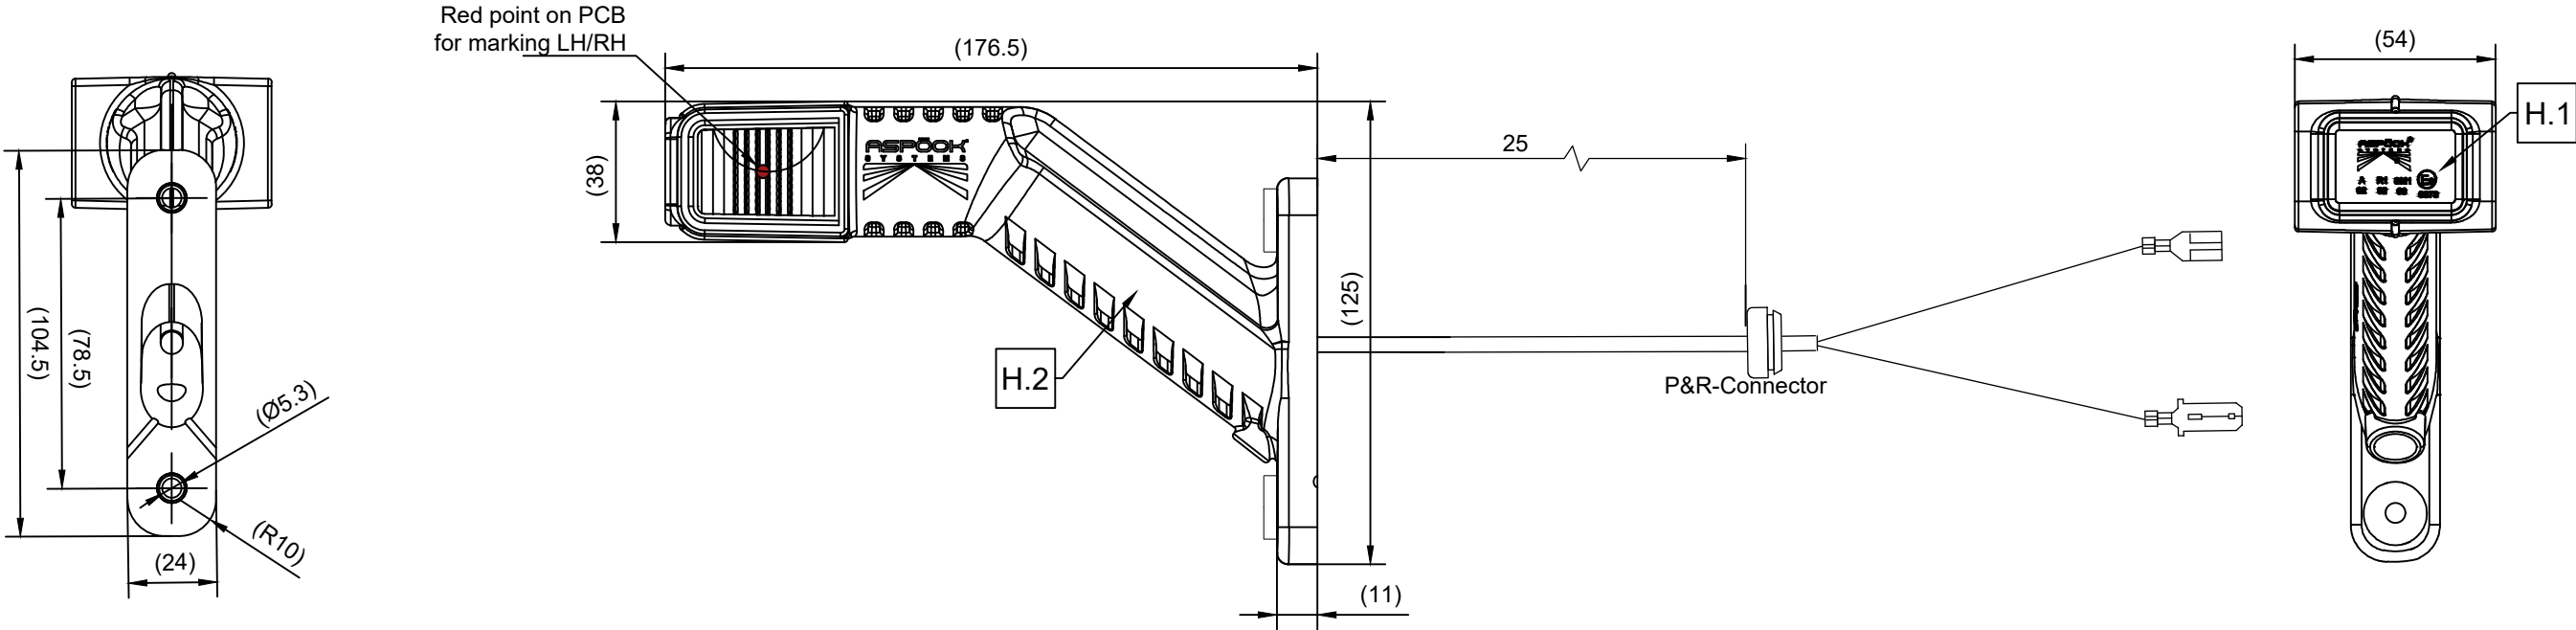

Electrical Specification				
Funktion Function	Nennspannung Nominal Voltage	Spannungsbereich Voltage Range	Nennstrom Nominal Current	Nennleistung Nominal Power
Volt (V)	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
Side / Front / Back Position	12V	10V - 30V	0.058A	0.7W
Side / Front / Back Position	24V	10V - 30V	0.058A	1.4W

Asp. Norm AAW075.04 () Auxiliary dimension DIN 406-10

Test dimension (SPC) [] Unfinished dimension DIN 406-10

Theoretical dimension ISO 1101

Surface quality ISO 1302

Designed by Haslinger Sophie	2017/10/25	Checked by Strubreiter Daniel	2017/10/25	Approved by Enzlmüller Manuel	2017/10/08	DRAFT		
Designation					Project number -			
Drawing Nr. Business Unit SALES - 24					Tolerance Asp. PAW 100.53b1		Weight - g	Scale x:x
Dimensions in mm					Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.		Level R01	Sheet 1 / 1