






* IP59 HALDEX-connector

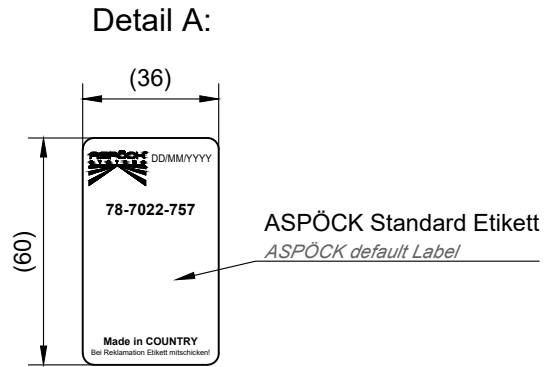

CONNECTOR:	①	
function	pin	wire colour
NO FUNCTION	1	-
+VDC Bat	2	rot <i>red</i>
NO FUNCTION	3	-
NO FUNCTION	4	-
Masse <i>GND</i>	5	blau <i>blue</i>
CAN Low	6	gelb <i>yellow</i>
CAN High	7	grün <i>green</i>

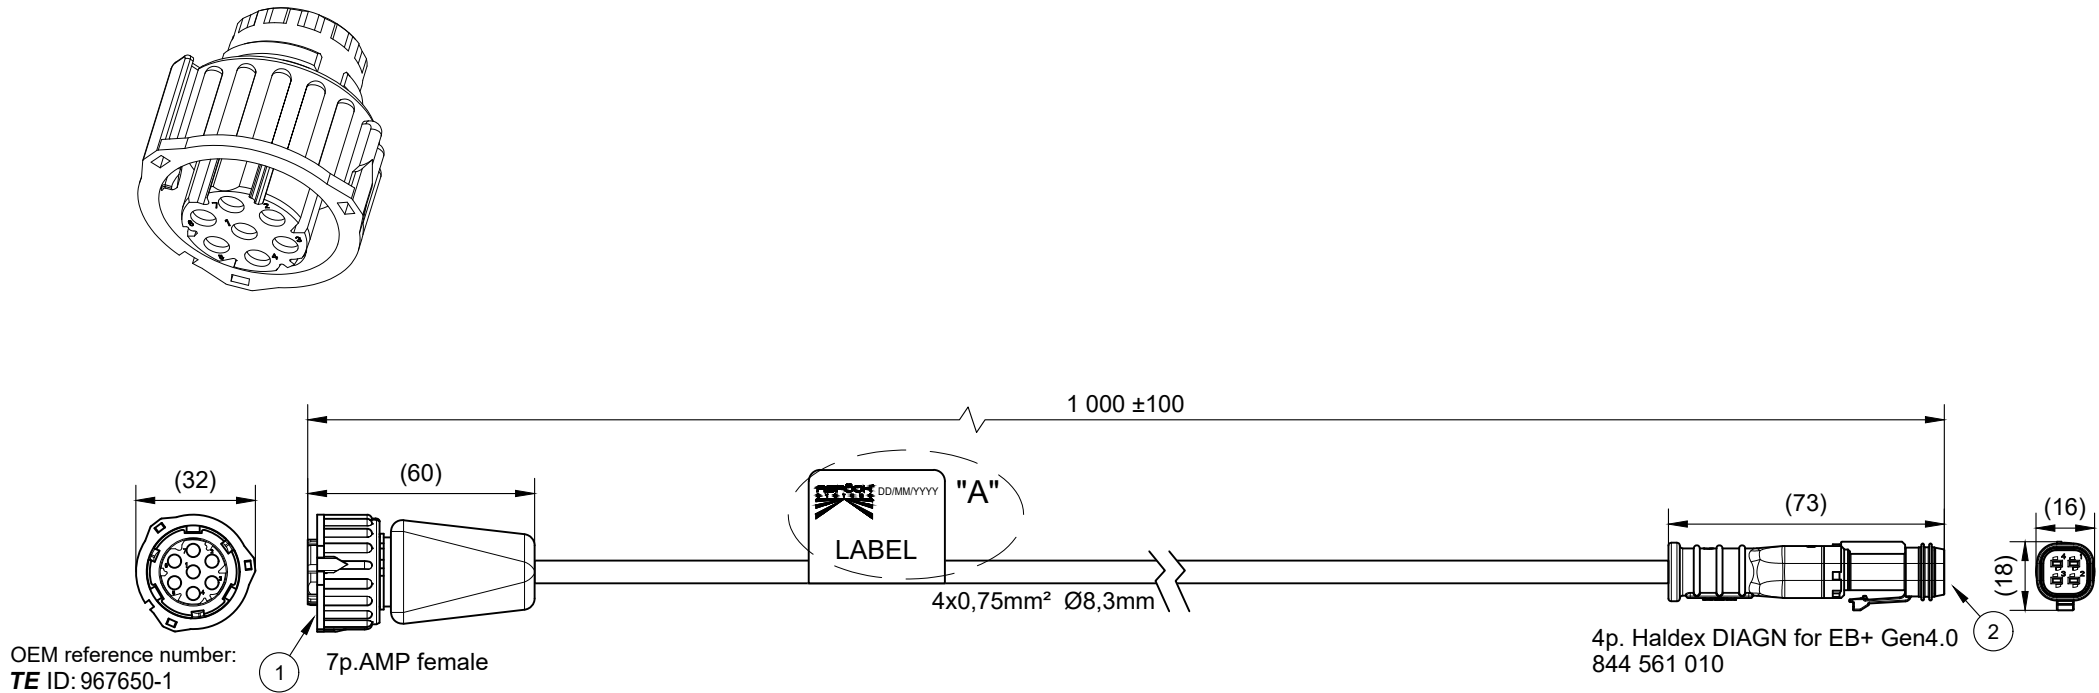

CONNECTOR:	②	
function	pin	wire colour
+VDC Bat	1	rot <i>red</i>
CAN High	2	grün <i>green</i>
CAN Low	3	gelb <i>yellow</i>
Masse <i>GND</i>	4	blau <i>blue</i>

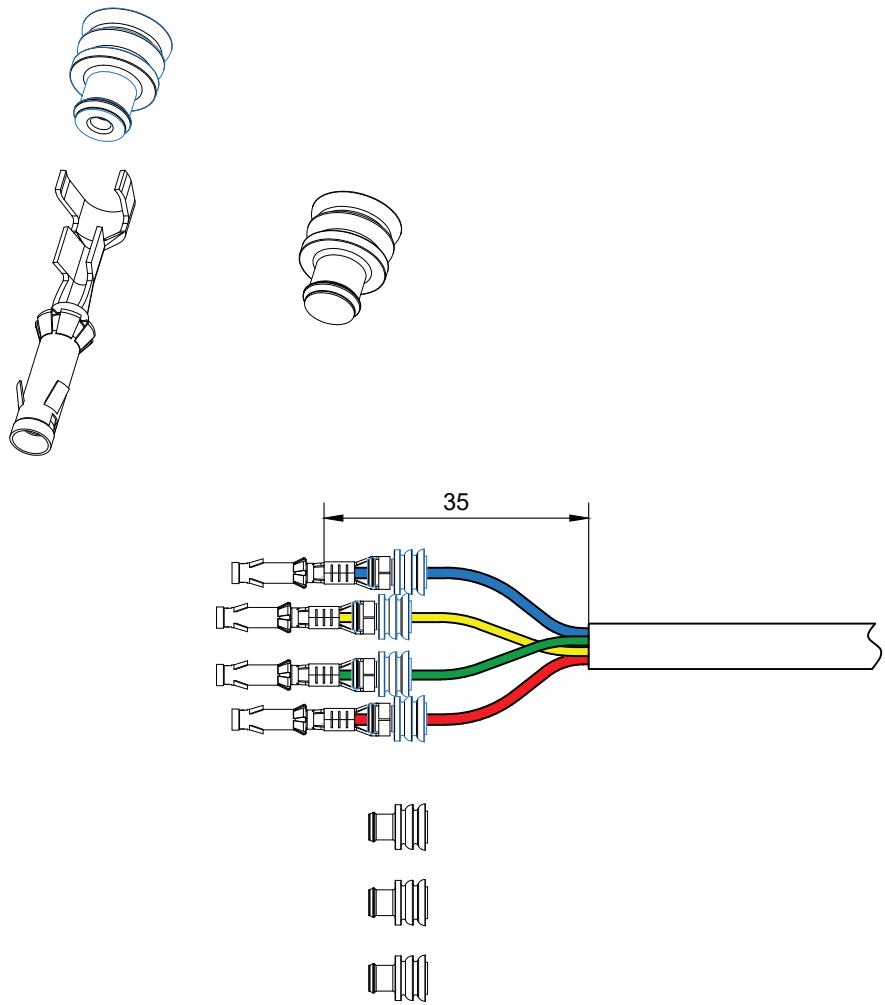

78-7022-757	CP_03-0_Bemaßungsrichtlinie () Auxiliary dimension DIN 406-10		Theoretical dimension ISO 1101		
	Test dimension (SPC) [] Unfinished dimension DIN 406-10		Surface quality ISO 1302		
	Designed by Leidinger Sabine		Checked by Strubreiter Daniel		
	2023/10/17		2023/10/17		
Approved by Enzlmüller Manuel		2023/10/19		ASPÖCK Design Engineering APPROVED	
Designation TPMS Haldex EBS4 - K1.2 1m					
Drawing Nr. 78702275					
Business Unit SALES - 24		Tolerance CP_04-2_Toleranzen Verkabelungsprodukte		Weight -	Scale not in scale
Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.		Level R01		Sheet 1 / 1	