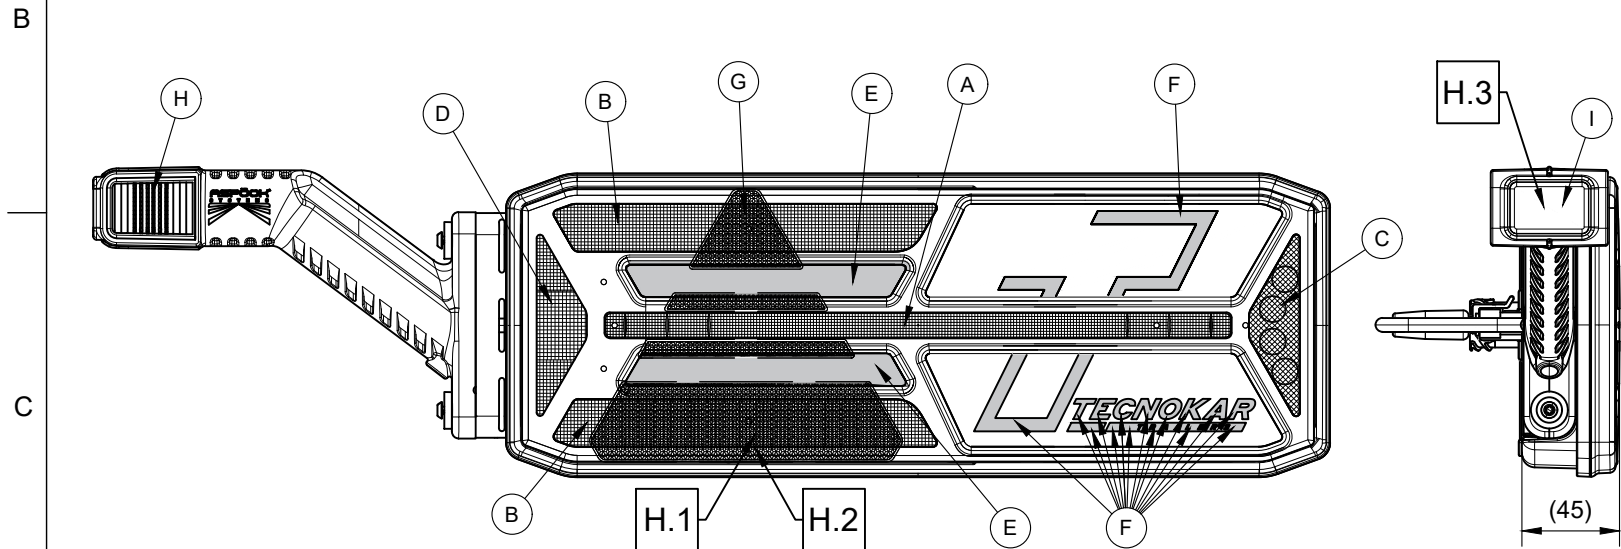
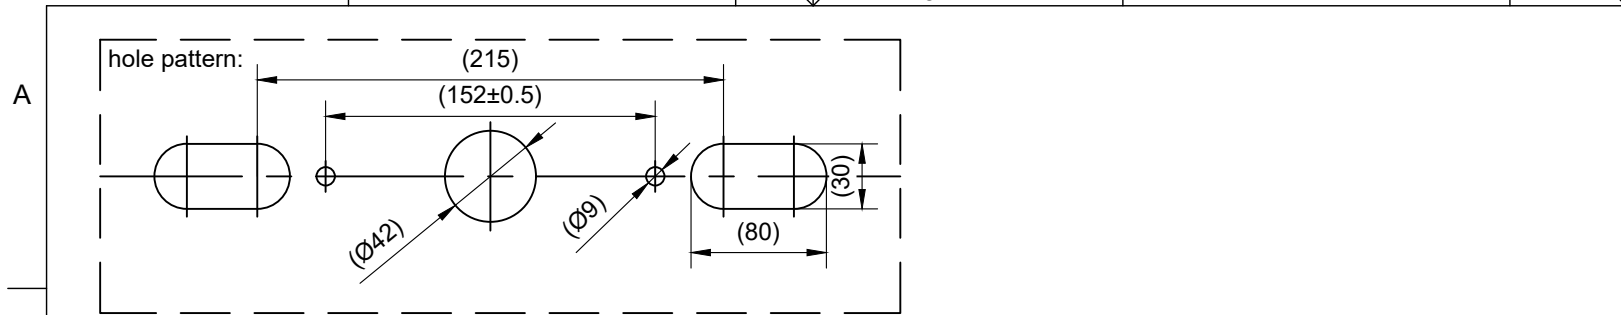


Technische Daten zur SMCG/technical specification for SMCG:


Spannungsbereich/voltage range: 18V - 33V
Strombereich/current range: Ausgangsstrom/output current max. 1A
Elektronisch Überspannungs - und Überstromgesichert/overcurrentprotected
Thermische Stromabschaltung am Ausgang bei ca. 1,2A
(Kurzschlussfest) Verpolungsschutz/thermal power cut-off at the output at approx. (shortcircuit proof) reserve polarity protection

Homologation description							
H.1	E9 24422	148R 01	R1	S1	2a	AR	F1
H.2	E24 3902	10R 06					
H.3	E9 6878	SM1 00	A 02	R1 02			
H.4	E9 6765	10R 05					


FUNCTION:	
Rücklicht. RH Tail RH	I
SMCG Ausgang (Rückl. LH) SMCG out (Tail LH)	II
Rücklicht. LH Tail LH	III
Rückfahrll. Reverse	IV

FUNCTION:	
Blinker LH LED DI LH LED	A
Bremse LED Stop LED	B
Nebelschl. LED Fog LED	C
Rückfahrll. LED Reverse LED	D
Rücklicht LH LED Tail LH LED	E
Rücklicht RH LED Tail RH LED	F
Reflektierendes Dreieck Reflex reflector triangle	G
Positionslicht rot (Umrissarm) Position light red (rubber arm) (Tail RH)	H
Seitenmarkierung rot (Umrissarm) Side marker red (rubber arm) (Tail RH)	I
Positionslicht weiss (Umrissarm) Position light white (rubber arm) (Tail RH)	J

Level	Zone	ECI N°.	Revision note	Date	Designed	Checked
R02	02	28073	Richtigstellung correction	2025/11/13	Livinsch.G	Lenzen.S

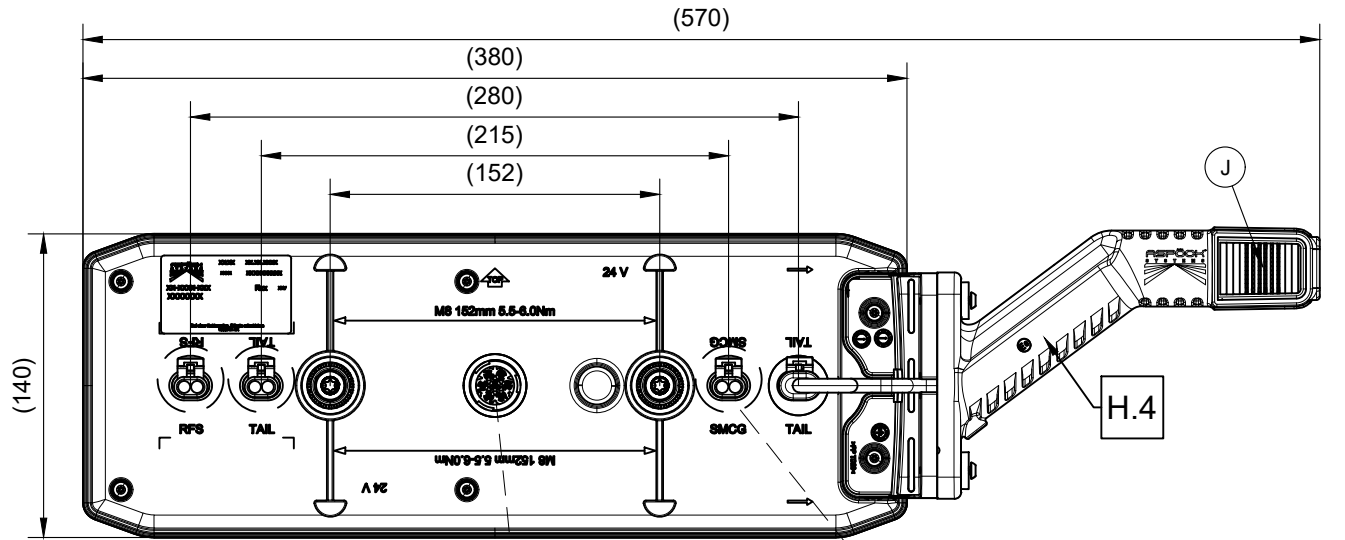

7p.AMP LH	
FUNCTION	PIN
Masse GND	1
Rücklicht LH Tail LH	2
Rückfahrll. Reverse	3
Blinker LH DI LH	4
Bremse Stop	5
Nebelschl. Fog	6
Rücklicht RH Tail RH	7

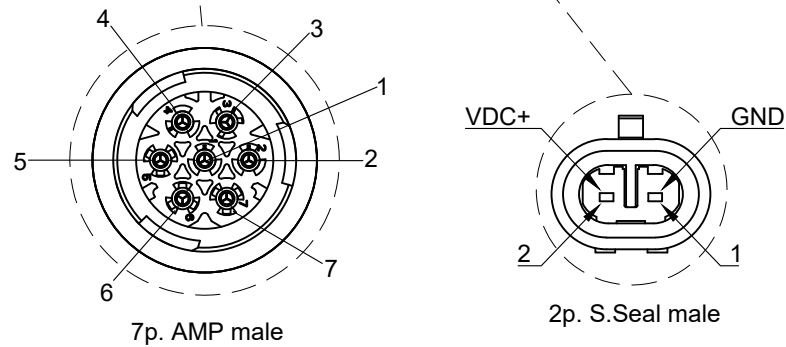

Electrical Specification				
Funktion Function	Nennspannung Nominal Voltage	Spannungsbereich Voltage Range	Nennstrom Nominal Current	Nennleistung Nominal Power
	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
DI	24V	18V - 33V	0.35A	8.3W
Stop	24V	18V - 33V	0.16A	3.8W
Reverse	24V	18V - 33V	0.11A	2.7W
Fog	24V	18V - 33V	0.17A	4.0W
Tail LH	24V	18V - 33V	0.15A	3.6W
Tail RH	24V	18V - 33V	0.10A	2.5W
End outline marker	24V	10V - 30V	0.13A	3.0W

CP_03-0_Bemaßungsrichtlinie () Auxiliary dimension DIN 406-10		Theoretical dimension ISO 1101	
Test dimension (SPC) [] Unfinished dimension DIN 406-10		Surface quality ISO 1302	
Designed by Livinschi Gabriela 2025/09/30		Checked by Leidinger Sabine 2025/09/23	
Approved by Lenzenweger Stefan 2025/09/23		ASPOCK Design Engineering APPROVED	
25-4123-437		Designation VRECD3 TECNOKAR LH AMP 7P+4*2P SMCG+EOL	
Part Number		Drawing Nr. 25412343	
Dimensions in mm		Business Unit SALES - 24	
		Tolerance CP_04-2_Toleranzen Verkabelungsprodukte	
		Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication there of to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.	
		Project number -	
		Weight -	
		Scale not in scale	
		Level R02	
		Sheet 1 / 1	