






Detail A:





ASPÖCK Standard Etikett
ASPÖCK default Label

CONNECTOR:	①		
function	pin	wire colour	bridged
eRx1 CAN Low	1	-	-
eRx1 CAN High	2	-	-
KL15	3	rot red	rot red
Vin	4	-	rot red
Chassis Can Low	5	grün/weiss green/white	-
Chassis Can High	6	gelb/weiss yellow/white	-
NC	7	-	-
eRx2 CAN Low	8	-	-
eRx2 CAN High	9	-	-
eRx1 VDD	10	-	-
eRx1 GND	11	-	-
NC	12	-	-
GND KL31	13	blau blue	-
Reserved / CAN Low Pass-through	14	-	-
Reserved / CAN Low Pass-through	15	-	-
NC	16	-	-
eRx2 GND	17	-	-
eRx2 VDD	18	-	-

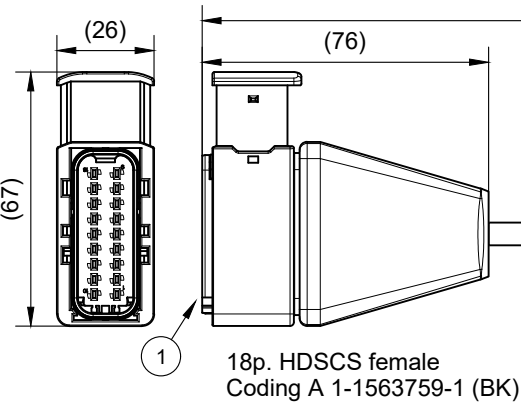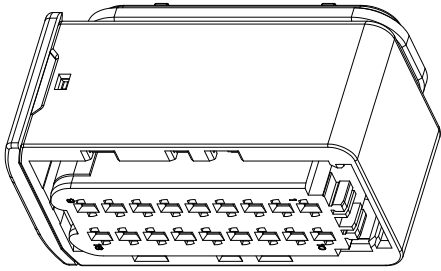


18p. HDSCS female
Coding A 1-1563759-1 (BK)

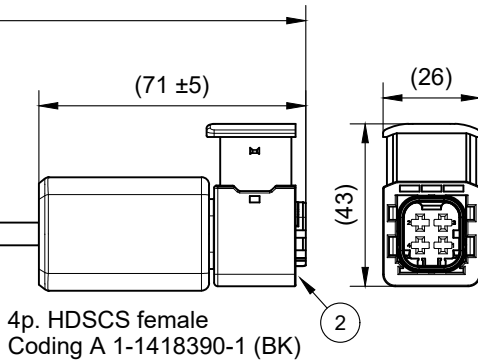

4p. HDSCS female
Coding A 1-1418390-1 (BK)

CONNECTOR:	②	
function	pin	wire colour
+VDC Bat	1	rot red
CAN High	2	gelb/weiss yellow/white
CAN Low	3	grün/weiss green/white
Masse GND	4	blau blue

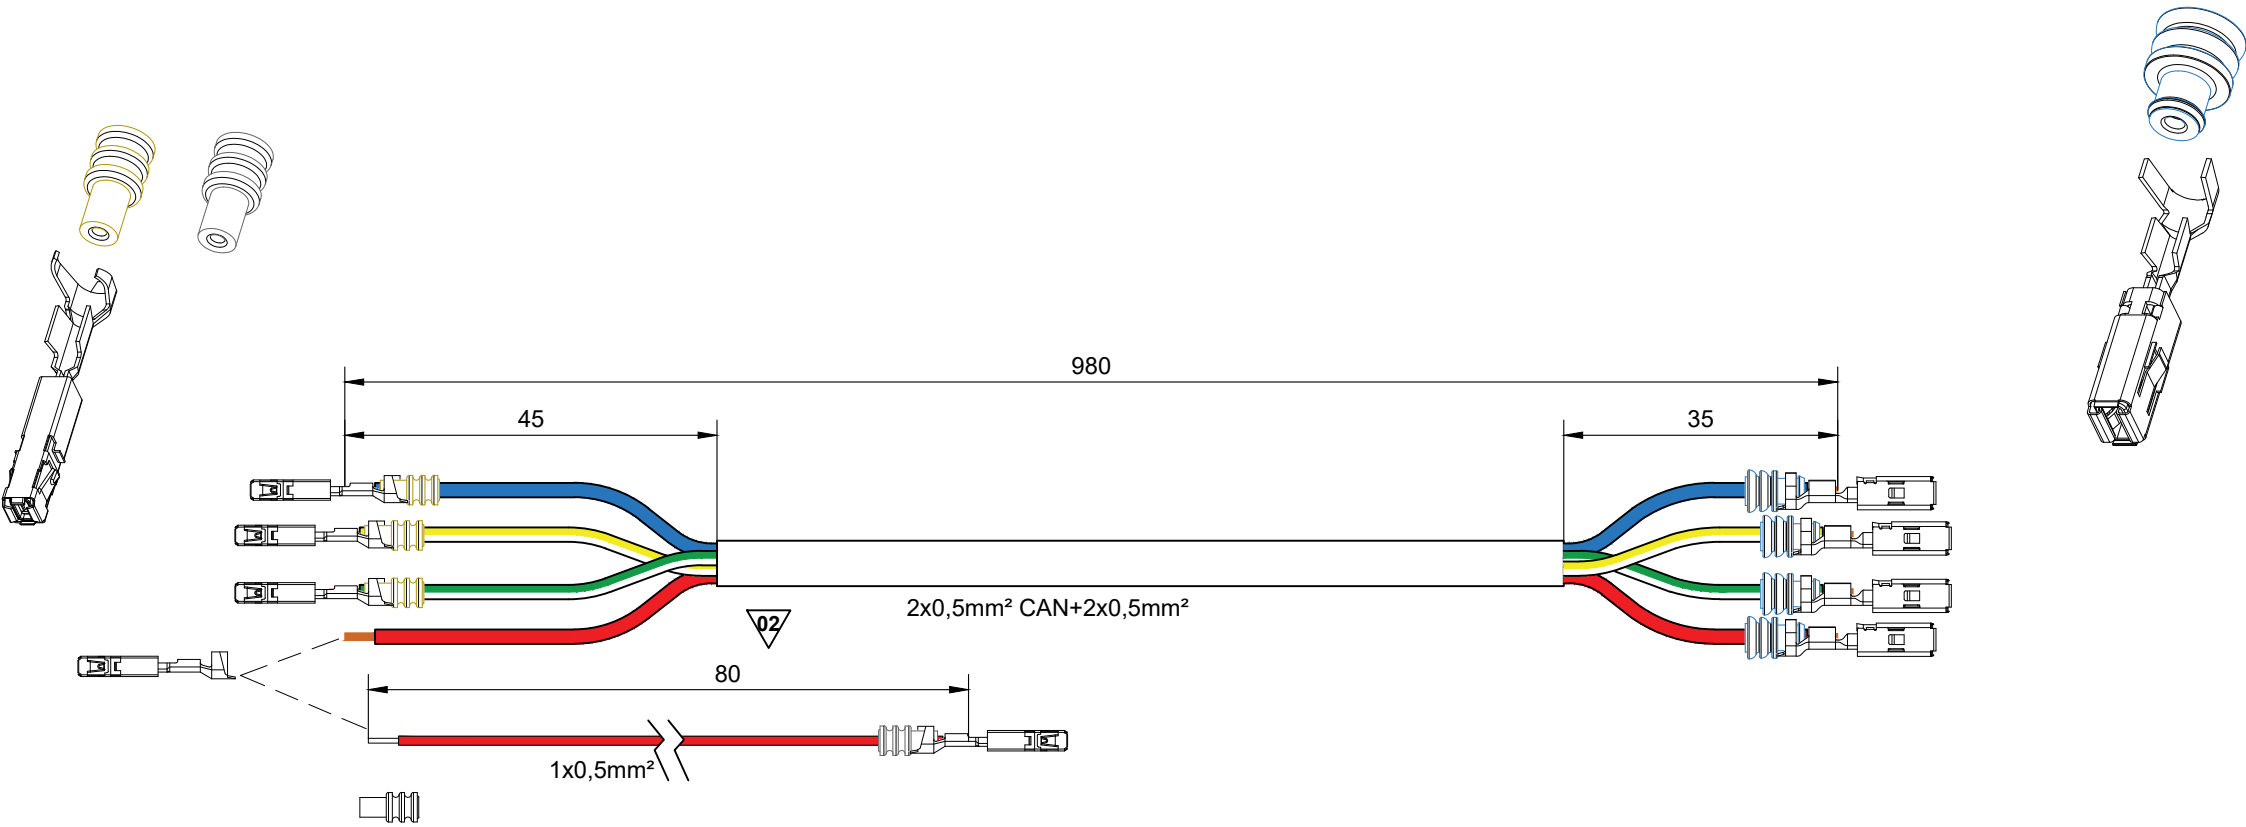

Level	Zone	ECI №.	Revision note	Date	Designed	Checked
R02	02	21860	Stecker Brücke PCBA entfällt Connector Bridge PCBA removed	2024/02/13	Wetzlm.G	Kaltseis A.

CP_03-0_Bemaßungsrichtlinie () Auxiliary dimension DIN 406-10		Theoretical dimension ISO 1101	
Test dimension (SPC) [] Unfinished dimension DIN 406-10		Surface quality ISO 1302	
Designed by Leidinger Sabine		Checked by Strubreiter Daniel	
2023/10/16		2023/10/17	
Approved by Enzlmüller Manuel		2023/10/17	
Designation TPMS Knorr EBS4-Rx18 1m		Project number 1237	
Drawing Nr. 78702210		Tolerance CP_04-2_Toleranzen Verkabelungsprodukte	
Business Unit SALES - 24		Weight - Scale not in scale	
Dimensions in mm		Level R02	
Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.		Sheet 1 / 1	