




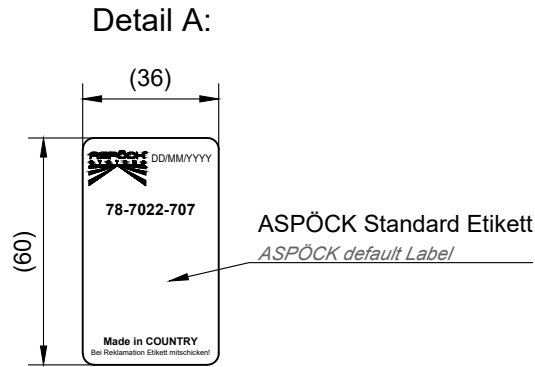



* IP59 HALDEX-connector

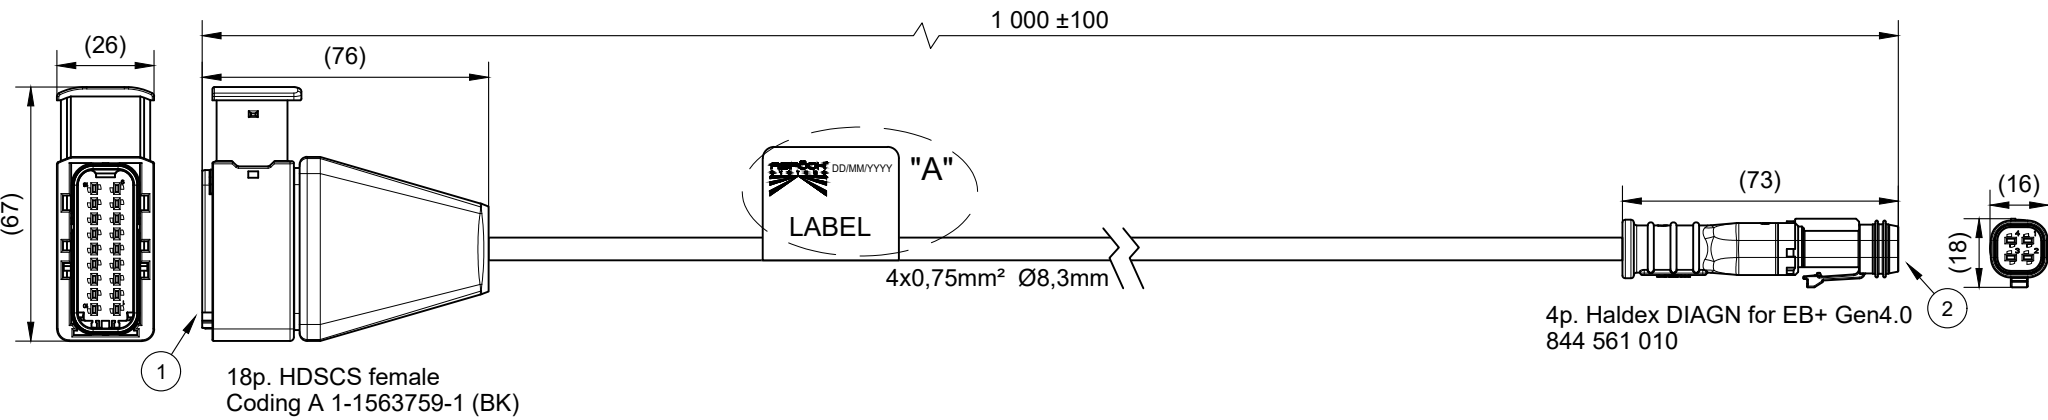

CONNECTOR:	①		
function	pin	wire colour	bridged
eRx1 CAN Low	1	-	-
eRx1 CAN High	2	-	-
KL15	3	rot <i>red</i>	rot <i>red</i>
Vin	4	-	rot <i>red</i>
Chassis Can Low	5	gelb <i>yellow</i>	-
Chassis Can High	6	grün <i>green</i>	-
NC	7	-	-
eRx2 CAN Low	8	-	-
eRx2 CAN High	9	-	-
eRx1 VDD	10	-	-
eRx1 GND	11	-	-
NC	12	-	-
GND KL31	13	blau <i>blue</i>	-
Reserved / CAN Low Pass-trough	14	-	-
Reserved / CAN Low Pass-trough	15	-	-
NC	16	-	-
eRx2 GND	17	-	-
eRx2 VDD	18	-	-

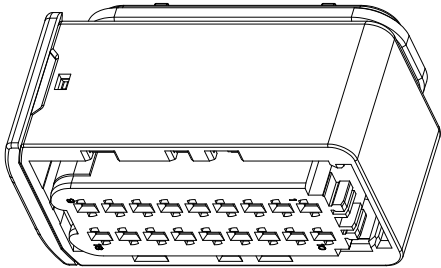

CONNECTOR:	②	
function	pin	wire colour
+VDC Bat	1	rot <i>red</i>
CAN High	2	grün <i>green</i>
CAN Low	3	gelb <i>yellow</i>
Masse <i>GND</i>	4	blau <i>blue</i>

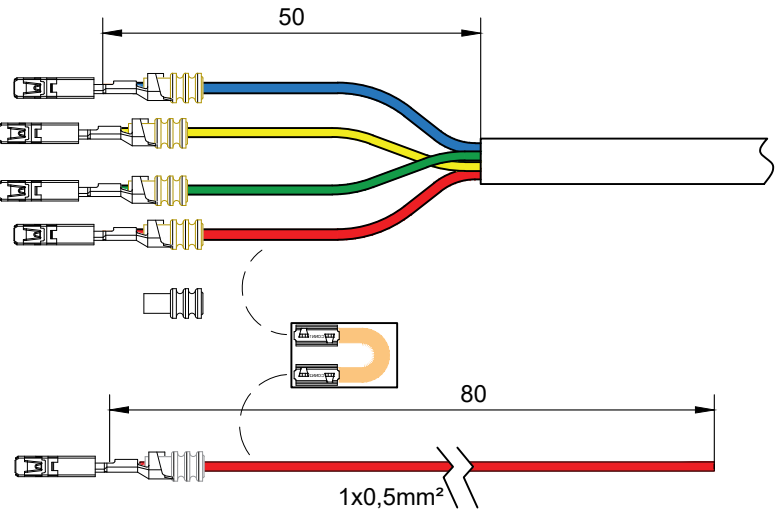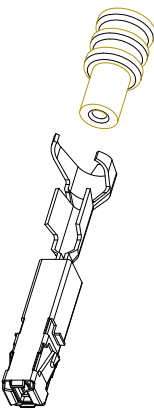

CP_03-0_Bemaßungsrichtlinie () Auxiliary dimension DIN 406-10		Theoretical dimension ISO 1101	
Test dimension (SPC) [] Unfinished dimension DIN 406-10		Surface quality ISO 1302	
Designed by Leidinger Sabine		Checked by Strubreiter Daniel	
2023/10/17		2023/10/17	
Approved by Enzlmüller Manuel		2023/10/19	
Designation TPMS Haldex EBS4 - Rx18 1m		Project number 1237	
Drawing Nr. 78702270		Tolerance CP_04-2_Toleranzen Verkabelungsprodukte	
Business Unit SALES - 24		Weight -	
Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.		Scale not in scale	
Level R01		Sheet 1 / 1	