
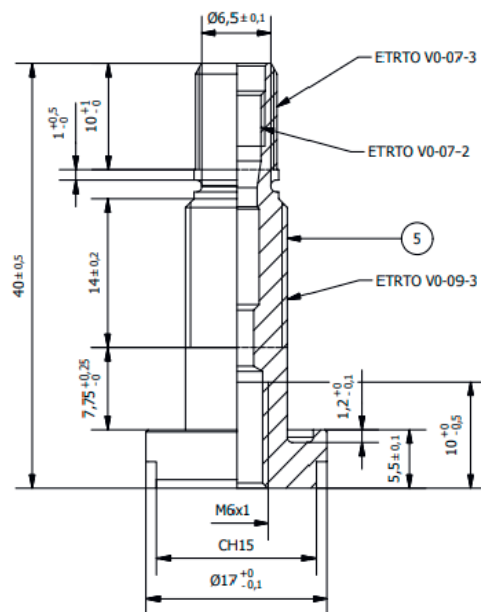



Ø1.9

VALVE FOR DISK WHEEL 22,5x11,5 SPEEDLINE

- _ Salt spray fog resistance as per DIN EN ISO 9227: no red corrosion before 240h.
- _ ETRTO core chamber: ETRTO V0-05-1
- _ Torque value of sensor connecting screw: 4±0,5 Nm
- _ Core pin head position -0,90/+0,25 mm (ETRTO -SM-V.7)
- _ Valve nut torque: 12÷15Nm



WONDER S.p.a.
www.wonder.auto
info@wonder.auto
CREMONA ITALY VIA N.SAURO N°12
TEL: (+39)0372/421811 FAX: (+39)0372/24334

THIS DRAWING, DESIGNS AND DATA DEPICTED IN IT ARE THE CONFIDENTIAL PROPERTY OF WONDER S.p.A., WHO RESERVE ALL RIGHTS THEREON. BY ACCEPTING THIS DRAWING, THE RECIPIENT AGREES NOT TO COPY, USE, MANUFACTURE, OR COMMUNICATE TO OTHERS, WHOLLY OR IN PART, EITHER THIS DRAWING OR THE DESIGNS OR DATA DEPICTED IN IT EXCEPT AS EXPRESSLY AUTHORIZED IN WRITING BY WONDER S.p.A.

Raw Material/Materiale See tab.	Surface Treatment/Trattamento See tab.	Weight/Peso 33,0 g		
Description/Descrizione:		Drawing No/Disegno N° DW3607		
		Gen.Tol./Toll.Gen. UNI EN 22768-mK	Format/Formato A3	Scale/Scala 2 : 1
		Recorded Data/Valori registrati		
Code/Codice: See tab.		S	Critical Features/Caratteristica Critica Cpk ≥ 1,67 for Production Ppk ≥ 1,67 for PPAP	
		◇	Important Features/Caratteristica Importante Cpk ≥ 1,33 for Production Ppk ≥ 1,67 for PPAP	
Replaced N°/Sostituisce N°:				
Is replaced/Sostituito da:				