


Informazioni prodotto

Product information



WORKPOINT II 1000

DESIGN COMPATTO, FUNZIONALE NELL'USO
COMPACT DESIGN, FLEXIBLE IN USE




VANTAGGI DEL PRODOTTO

- Illuminazione efficiente con design compatto
- Colore della luce simile alla luce del giorno
- Compatto e leggero (peso: 410 g)
- Rotazione verticale (range da - 40° a + 110°)
- struttura in plastica conduttiva che garantisce un'ottima resistenza alla corrosione e dissipazione del calore
- Staffa e viti in acciaio inox

PRODUCT BENEFITS

- Efficient lighting of the environment combined with space-saving design
- Light colour similar to daylight
- Compact and lightweight (weight 410 g)
- Vertical rotation range from -40° to +110°
- Thermally conductive plastic for excellent corrosion resistance and heat dissipation
- High-quality stainless steel bracket and screws

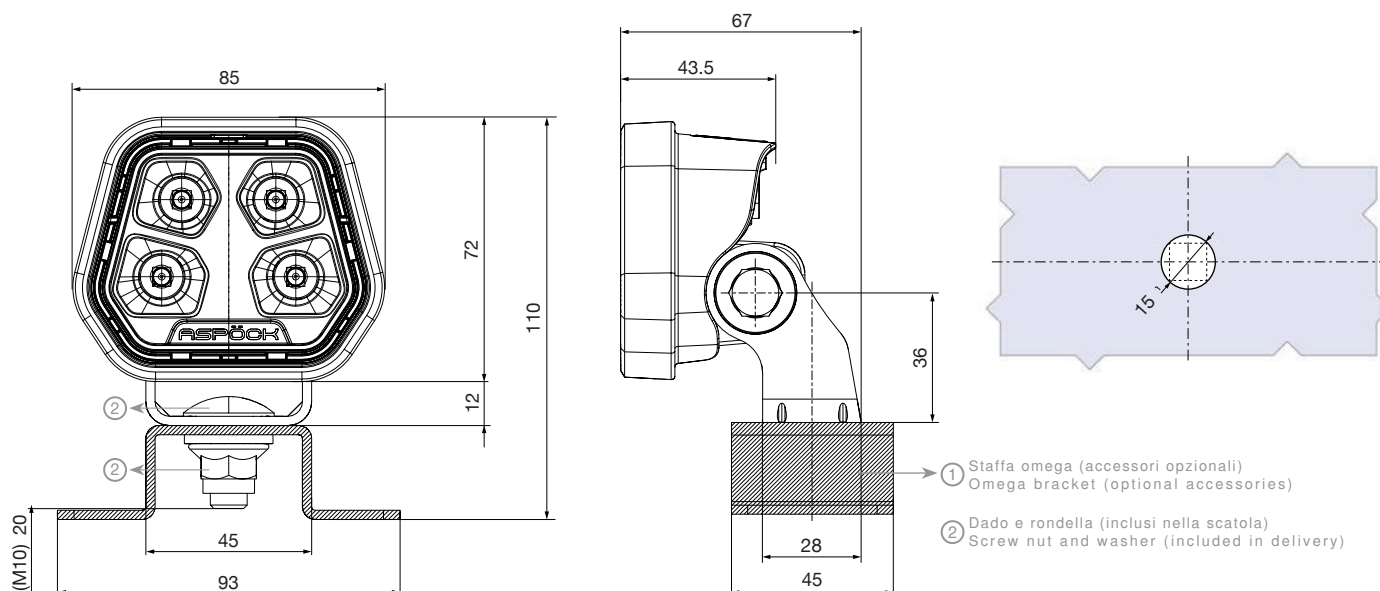

WORKPOINT II 1000

TECHNISCHE DATEN TECHNICAL FACTS			
TENSIONE: VOLTAGE RANGE:		10 V - 33 V DC	
VOLTAGGIO NOMINALE: NOMINAL VOLTAGE:		12 V / 24 V DC	
PROTEZIONE DA INVERSIONE DI POLARITÀ: REVERSE POLARITY PROTECTION:		SI YES	
MATERIALI: MATERIAL:	STRUTTURA: HOUSING:	Alluminio rivestito Coated aluminium	
	LENTI: LENS:	PMMA	
TEMPERATURA D'ESERCIZIO: TEMPERATURE RANGE:		-40°C~ +50°C	
TEMPERATURA DI STOCCAGGIO: STORAGE TEMPERATURE:		-40°C~ +90°C	
PESO (SENZA CAVO): WEIGHT (WITHOUT CABLE):		410 g	
DIMENSIONI (INCLUDENDO LA STAFFA): DIMENSIONS (INKL. BRACKET):		84 x 84 x 67 mm (A x L x P) 84 x 122 x 76 mm (H x W x D)	
LUMINOSITA' COLORE: LUMINOUS COLOUR:		5700 K	
FLUSSO LUMINOSO: LUMINOUS FLUX:		1050 lm (dopo 30 min a 25°C) / >105 lm/W (after 30 min at 25°C) / >105 lm/W	
CRI (RESA CROMATICA): CRI:		>70	
ASSORBIMENTO: POWER INPUT NOMINAL VOLTAGE:		12 V: 10 W 24 V: 10 W	
CLASSE PROTEZIONE: PROTECTION CLASS:		IP 6K9K	
APPROVAZIONE EMC: EMC APPROVAL:		10R-06	 3223
TIPO OMOLOGAZIONE: TYPE APPROVAL:		AR 148R00-02	  0005
BIDIREZIONALITÀ: BIDIRECTIONAL:		No No	
RESISTENZA ALLA CORROSIONE: CORROSION RESISTANCE:		480 h	Test salino Salt spray test

WORKPOINT II 1000

CARATTERISTICHE TECNICHE E PROPRIETÀ FEATURES & PROPERTIES

ANGOLO DI REGOLAZIONE ADJUSTMENT ANGLE

Posizione -40°



Posizione 0°



Posizione +110°



MONTAGGIO PER FUNZIONE RETROMARCIA MOUNTING FOR REVERSING LAMP



Istruzioni di montaggio per ECE-R23
Mounting instructions for ECE-R23



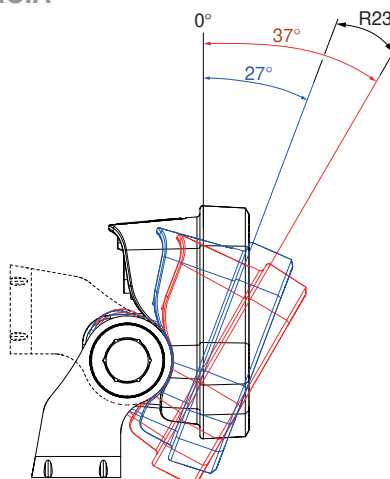


GRAFICO LUMINOSITÀ LIGHT PATTERN

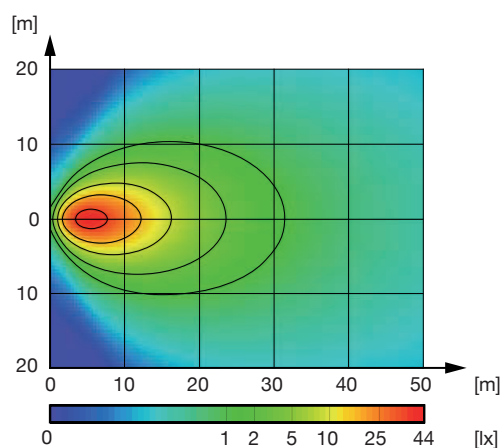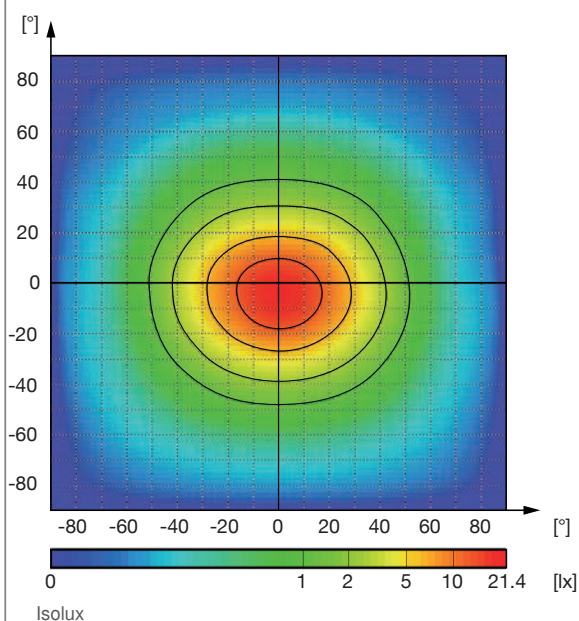

Bird's Eye View - 3 m assembly height with -15°

WORKPOINT II 1000

DESCRIZIONE / DESCRIPTION	OEM	AM
WORKPOINT II 1000 lumen con fascio luce 60° WORKPOINT II 1000 lm with 60° light beam angle		
Workpoint II con connettore DEUTSCH Workpoint II DT	28-8524-017	28-8524-011
Workpoint II + cavo sguainato da 1,5 m Workpoint II + 1,5 m cable open end	38-8524-017	38-8524-011
Workpoint II + connettore ASS2 con cavo da 1,5 m Workpoint II + 1,5 m cable ASS2	38-8524-067	38-8524-061
WORKPOINT II accessori WORKPOINT II accessoires		
Staffa omega Omega bracket	14-4302-227	14-4302-221
Cavo da 3 m per connettore DEUTSCH Extention for Workpoint II DT with 3 m cable (open end)	69-0236-017	69-0236-014
Cavo da 5 m per connettore DEUTSCH Extention for Workpoint II DT with 5 m cable (open end)	69-0236-007	69-0236-004
Cavo da 8 m per connettore DEUTSCH Extention for Workpoint II DT with 8 m cable (open end)	69-0236-027	69-0236-024
Cavo da 10 m per connettore DEUTSCH Extention for Workpoint II DT with 10 m cable (open end)	69-0236-037	69-0236-034