

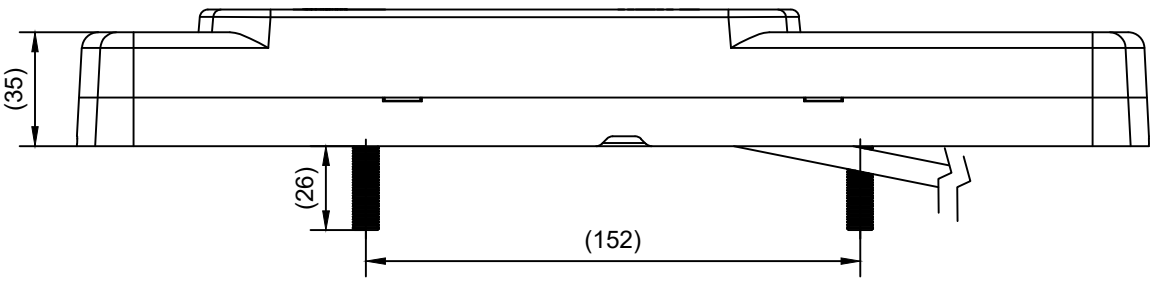
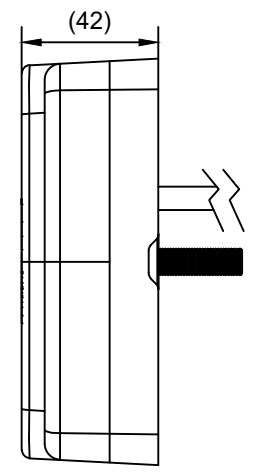


Level	Zone	ECI N°.	Revision note	Date	Designed	Checked

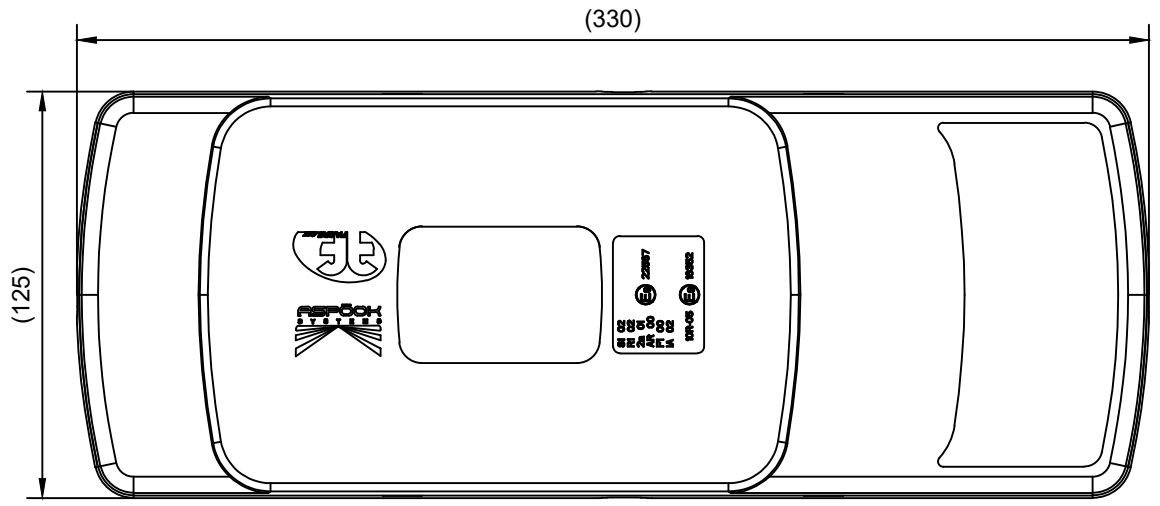

function	pin	wire colour
Blinker RH <i>DI RH</i>	1 / 4	grün <i>green</i>
Nebelschl. <i>Fog</i>	2	blau <i>blue</i>
Masse <i>GND</i>	3	weiss <i>white</i>
Rücklicht RH <i>Tail RH</i>	5	braun <i>brown</i>
Bremse <i>Stop</i>	6	rot <i>red</i>
-	7	-
Rückfahrl. <i>Reverse</i>	8	grau <i>grey</i>

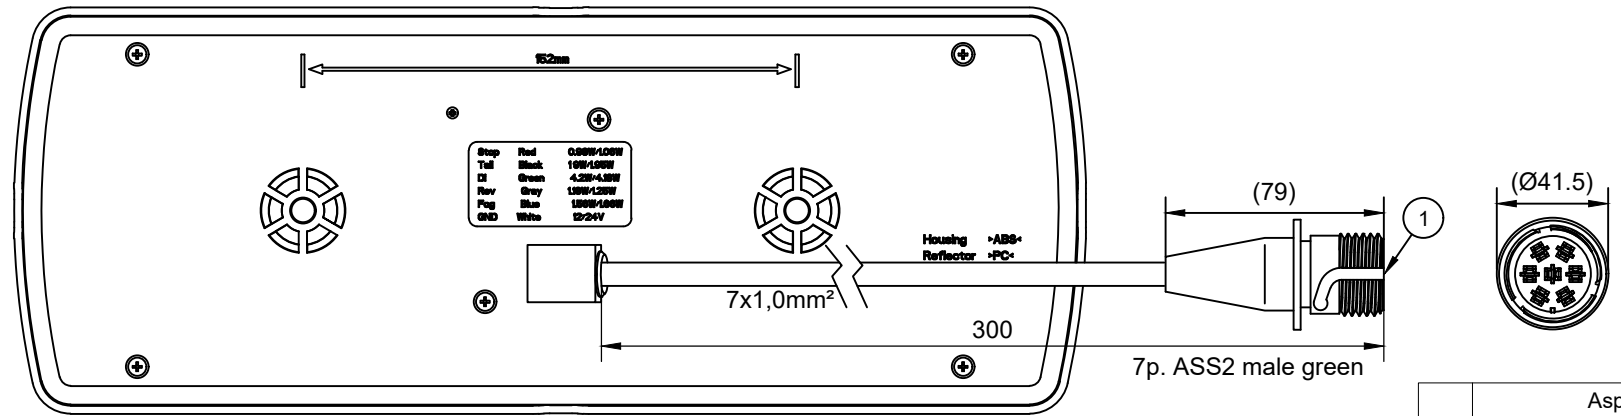

Electrical Specification				
Funktion <i>Function</i>	Nennspannung <i>Nominal Voltage</i>	Spannungsbereich <i>Voltage Range</i>	Nennstrom <i>Nominal Current</i>	Nennleistung <i>Nominal Power</i>
Volt (V)	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
DI	12V / 24V	10V - 30V	0.35A / 0.17A	4.2W / 4.18W
Stop	12V / 24V	10V - 30V	0.08A / 0.04A	0.98W / 1.06W
Tail	12V / 24V	10V - 30V	0.16A / 0.08A	1.9W / 1.95W
Reverse	12V / 24V	10V - 30V	0.1A / 0.05A	1.18W / 1.25W
Fog	12V / 24V	10V - 30V	0.13A / 0.07A	1.56W / 1.66W

Asp. Norm AAW075.04 ( ) Auxiliary dimension DIN 406-10  Theoretical dimension ISO 1101  
 Test dimension (SPC) [ ] Unfinished dimension DIN 406-10  Surface quality ISO 1302

Designed by: Klostermann Marcel 2019/06/25  
 Checked by: Strubreiter Daniel 2019/06/25  
 Approved by: Schmidbauer Dominik 2019/06/26

Designation: ST/T/DI/FOG/Rev./Reflex 41-201 ASS2 RH  
 Drawing Nr. 41201002  
 Business Unit SALES - 36

Part Number: 41-2010-021

Dimensions in mm:

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Project number: -  
 Weight: - g  
 Scale: x:x  
 Level: R01  
 Sheet: 1 / 1

